

DATA SHEET Neon Power Supplies ET 2120 LD TF and ET 2120 LD TF 277

- Two models, 120v. and 277v.
- UL listed Type 4
- Equivalent in performance to a 2 KV 120 mA magnetic neon transformer
- Dimmable with **3-Wire Triac Control** (Black/Line, White/Neutral and Red/Dimmed Hot). Compatible with Lutron NF-10 Fluorescent Dimmers or other similar dimming controls.
- Secondary supplied with 59" of silicone GTO 10 or GTO 15 integral sleeve and 1/2" conduit nipples.
- Ground Connection via Mounting Foot
- Minimal variation in current load with different tube lengths
- Primary connection, 1/2" female conduit nipple

- **FOR CANADA ONLY (CSA 22.2 No. 255-04)**
- These models are intended for both Field and Factory Installation.

Electrical data:

		2120LD 120	2120LD 277
Input:	Nominal Voltage	120 Volt	277 Volt
	Input Voltage Range	108V÷132V	249V÷305V
	Current	1.3 Ampere	0.6 Ampere
	Frequency	60 Hertz	60 Hertz
	Power	87 Watt	92 Watt
	Normal Power factor	≈ 0.5	≈ 0.55
	Output:	Voltage	2 kV rms max.
Nominal load current		87 mA	
Short circuit current		100 mA	
Frequency		25 kHz	

Performance:


- Self-adjusting
- Supplied with **open circuit protection, ground fault protection and protection against overloading**
- Maximum ambient temperature 104°F

Loading Chart (in feet)

Diameter	10mm	12mm	15mm	18mm	20mm	25mm
Argon/hg	13	14	15	15	16	18
Neon	10	11	11	12	13	14

(Deduct one foot per pair of electrodes)

(over)

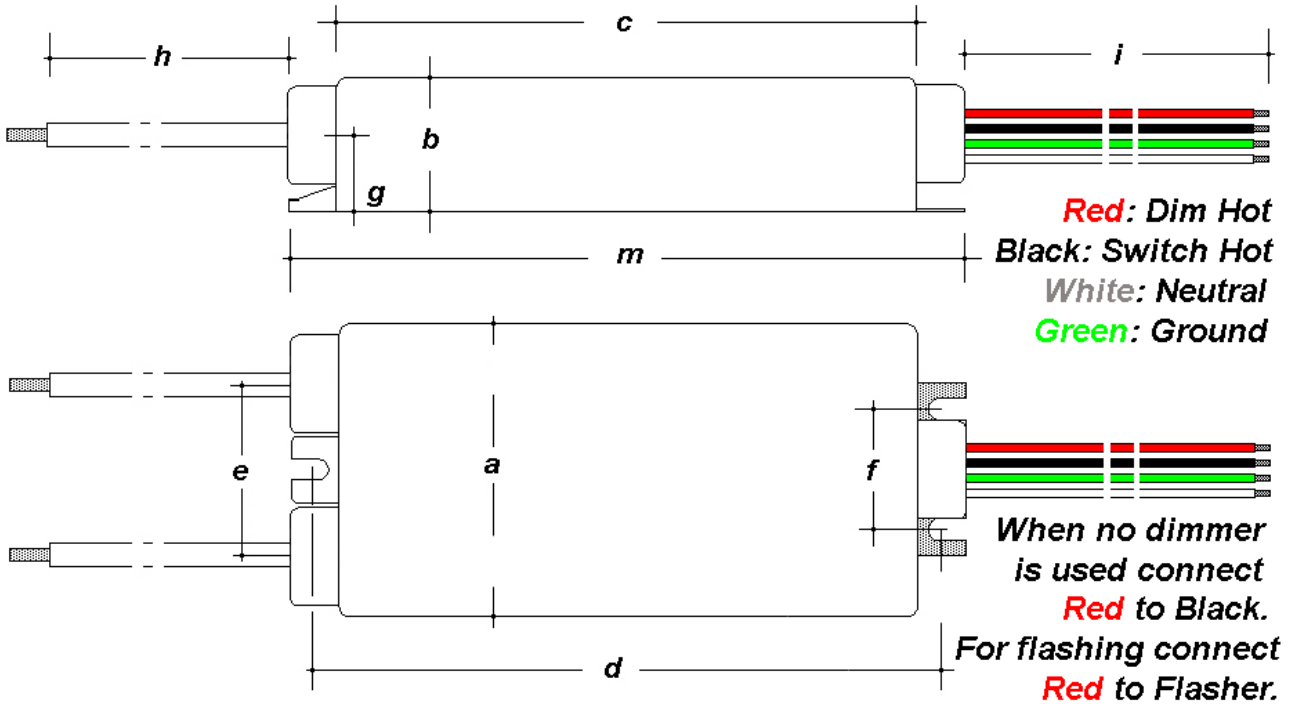

a	b	c	d	e	f	g	m	h	i	weight
2.83	1.46	5.98	6.38	1.61	1.06	0.77	6.89	59	39.37	31.8 oz.

All dimensions are in inches

INSTALLATION GUIDELINE

- If the power supply is close to the maximum load put a ## kΩ resistor in series with the secondary circuit. If the system stays lit the loading is correct. This test should be done before and after the installation to confirm that your installation is correct. *(The ## kΩ resistor is available for a minimal charge from your local sign supply distributor)*
- This step is very important for installations close to the limit of the power supply. The power supply has a microprocessor that senses any overload situation and immediately shuts down the power supply protecting both the power supply and your neon installation. The ## kΩ resistor insures you have a properly loaded power supply and a margin against nuisance tripping.
- Avoid extending the secondary leads beyond that supplied with the power supply.
- When conduit is required on secondary connections UL listed NON Metallic conduit and fittings must be used.
- The power supply may be installed on a metal surface. Sides can be in contact with a metal surface.
- Power supplies must be spaced **3/4" away** from one another.
- The distance between the lamps and parts with a different potential (other lamps, current conductors, parts connected to earth) shall be suitable for the voltage present which, at the frequencies produced by the power supply, can discharge easily through air and unsuitable insulating material.
- The material that supports the lamps must be always insulating.

