



n° 25B 4500K Triphosphor



Spectral Energy Distribution

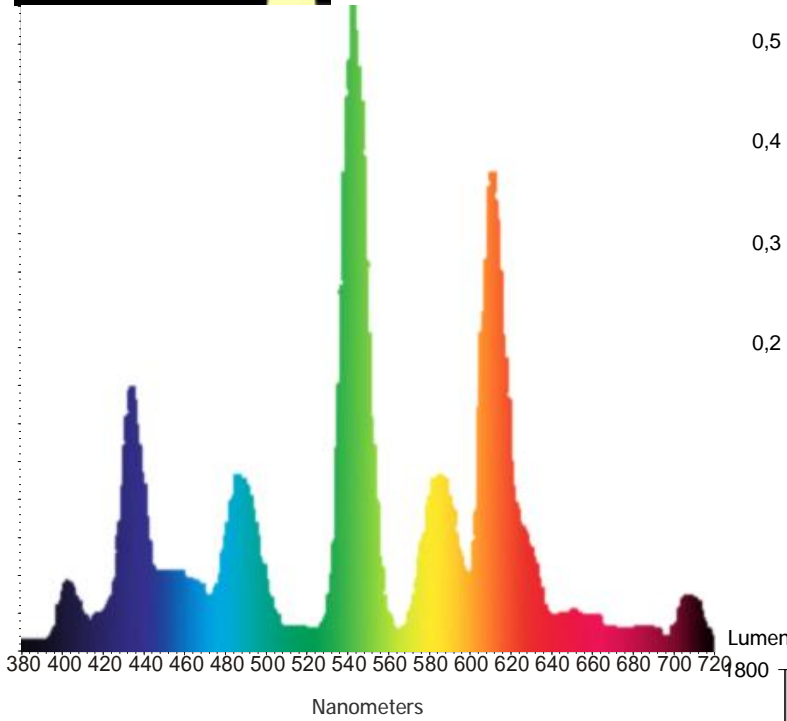


Discharge With Low Pressure Mercury Vapor

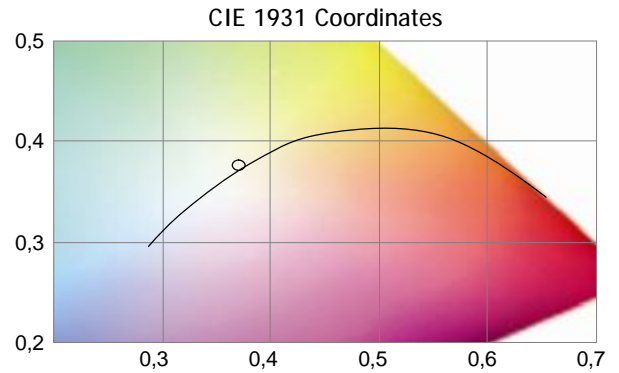


Luminous Flux 1 m - diam. 15 mm

- Ø6
- Ø8
- Ø10
- Ø12
- Ø15
- Ø18
- Ø20
- Ø25

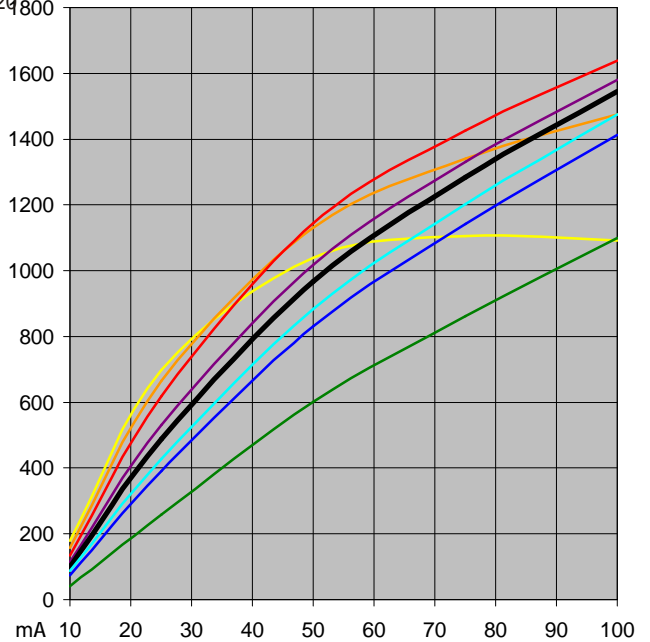

Data about for 15 mm. - 50 mA. Lamps:		
Color temperature	°K	4.256
Brilliance	cd/m ²	7.023
CIE 1931 Coordinates	x	0,371
	y	0,376
Color Rendering	CRI	89

Available in the followin glass types:	code
Lead Glass	K
Lead Free	LF
Borosilicate	P
Soda Lime	S

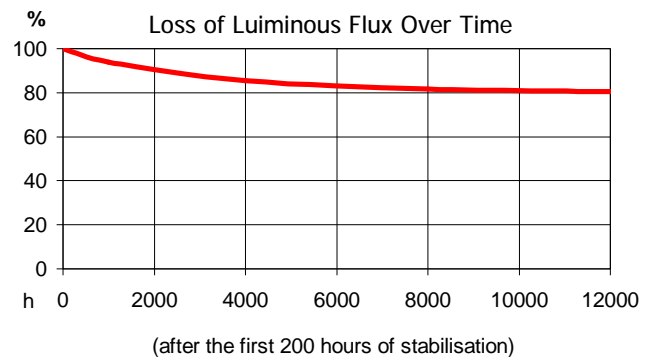

The information and recommendations contained in this publication are based upon data collected by TecnoLux and believed to be correct. However, no guaranty or warranty of any kind, expressed or implied, is made with respect to the information contained herein, and TecnoLux assumes no responsibility for the results of the use of products described here in.