


# n° 102S 4500° K Spectra




Spectral Energy Distribution

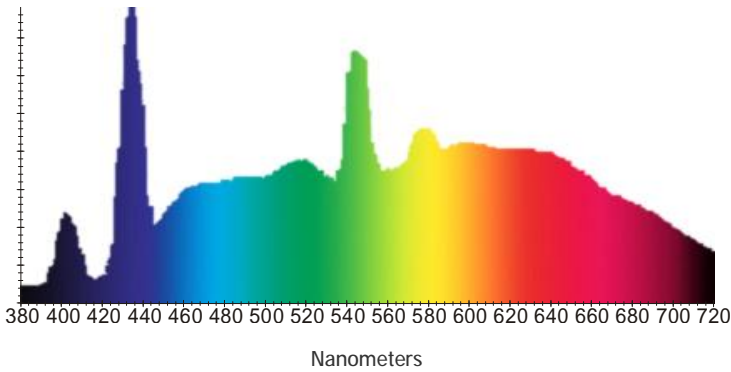


Discharge With Low Pressure Mercury Vapor

CIE 1931 Coordinates

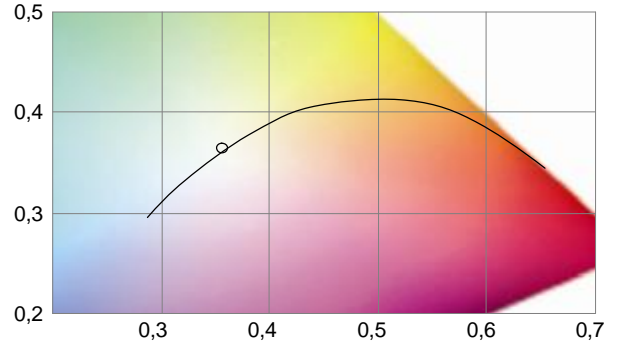


Luminous Flux 1 m - diam. 15 mm

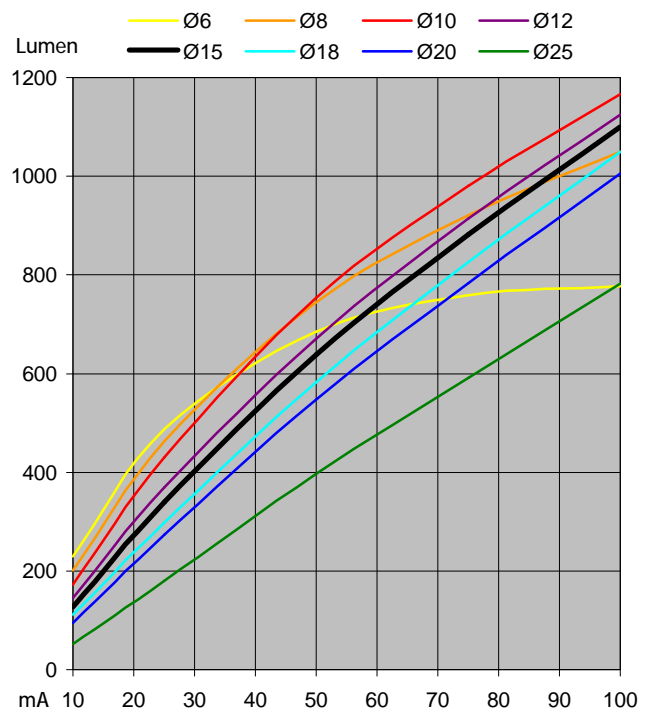

Data about for 15 mm. - 50 mA. Lamps:		
Color temperature	°K	4.680
Brilliance	cd/m <sup>2</sup>	4.632
CIE 1931 Coordinates	x	0,355
	y	0,365
Color Rendering	CRI	93

Available in the followin glass types:	code
Lead Glass	K
Lead Free	LF
Soda Lime	S

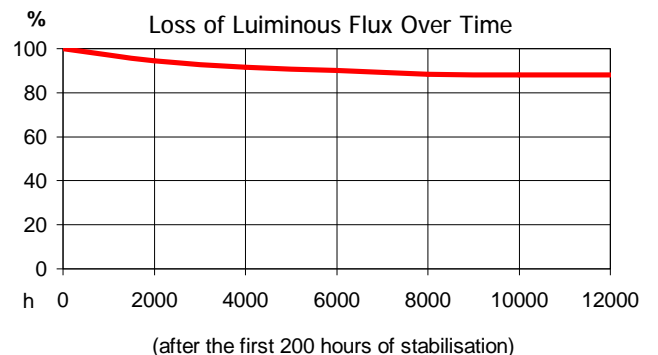

The information and recommendations contained in this publication are based upon data collected by TecnoLux and believed to be correct. However, no guaranty or warranty of any kind, expressed or implied, is made with respect to the information contained herein, and TecnoLux assumes no responsibility for the results of the use of products described here in.